

Operating Instructions For The Negative Pressure UV Printer

Installation Process:



Step 1: First of all, we connect the corresponding plug on the water tank (as shown in the figure: according to the corresponding connector on the sign can be connected), and tighten the nut to prevent the plug from bad contact.



Step 2: Find the negative pressure gas pump, connect the power cord plug, find the corresponding air valve, screw down the nut and tighten the trachea, prevent air leakage and air leakage (as shown in the figure: there are two trachea), the corresponding joint on the water tank, the water pipe can be gently pressed down to the bottom.



computer installation



Step 3: The front plug of the printer is connected to the computer host line, the back plug is connected to the water tank and negative pressure, the computer installation is the same as we install the operation, the connection completes the operation.

Operation Process:



wait for the reset to complete.

Step 1: Open the boot button, check whether the machine reset movement is normal, and



Step 2: Ink Pressing Operation


First of all, use the key of the ink cartridge to open the switch of the secondary ink cartridge accordingly, press the ink button on the nose, the negative pressure system will turn to positive pressure, discharge the ink, through the flowing ink, can eliminate the slight nozzle blockage and discharge a small amount of air in the ink, the ink is completed.




Step 3: Clean the nozzle with a clean, dust-free cloth.



Step 4: Open the operation computer and the printer control system (set the printing coordinates and print the nozzle test strip to ensure that the test strip is normal)

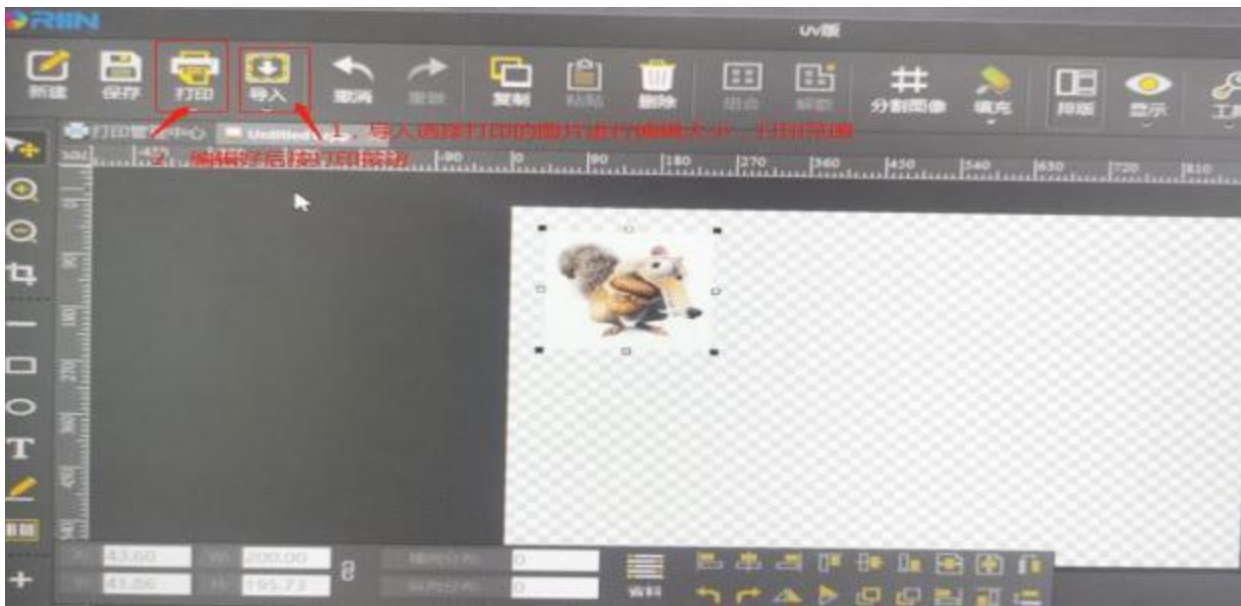

Step 5: Open the RIIN system to import the pictures that need to be printed, process the pictures, set the size and channel of the pictures that need to be printed (when special colors are required), and press the print to generate a new file.

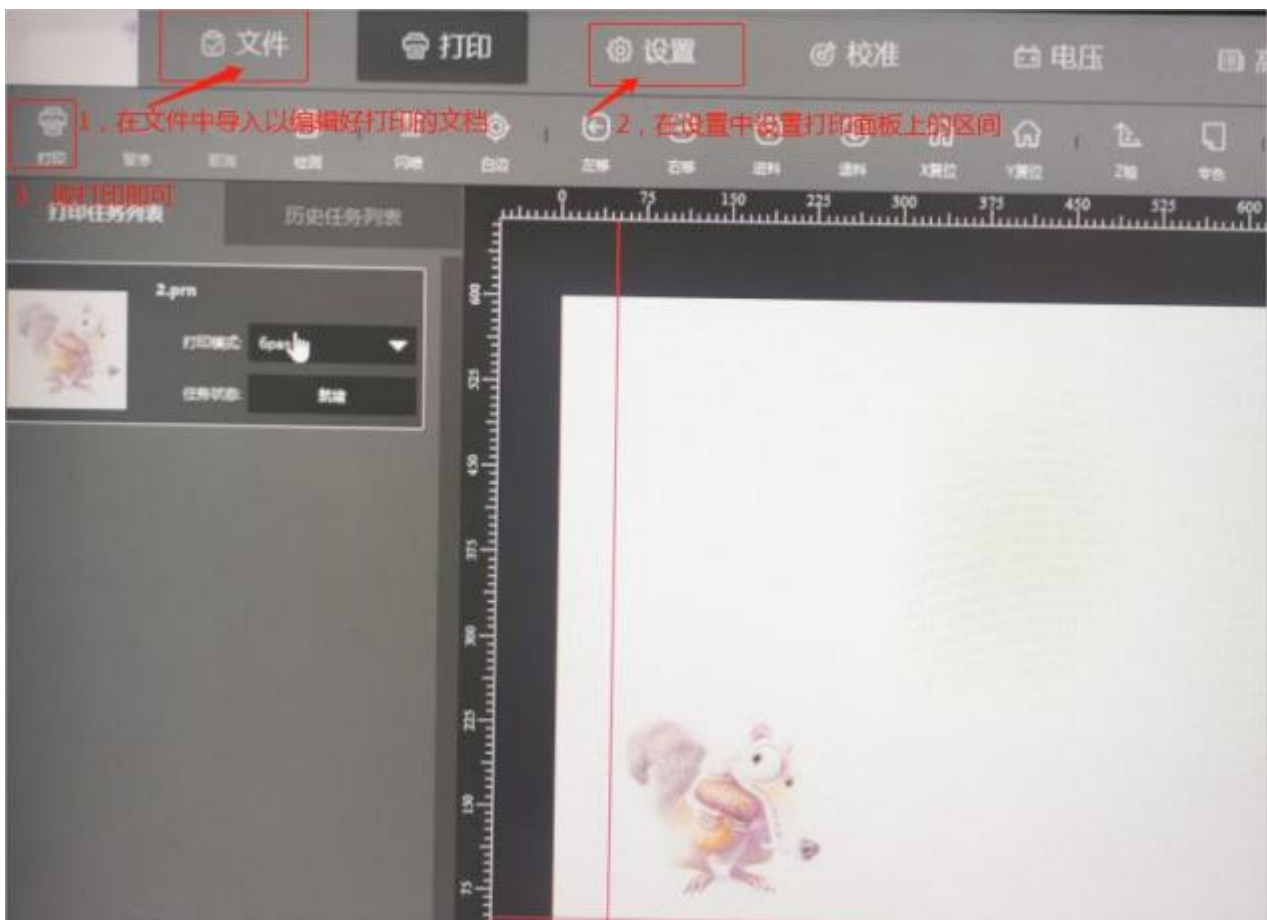

Step 6: Open the connected printer system, find the edited document in the file printing, select the printing range on the printer in the Settings, and press the print key to complete the printing.

Step 7: Use alcohol and hair-free fabrics to clean up the surface of the product material to ensure that the surface of the material is not dirty.



Note: Before printing pictures, you need to check whether the UV machine is working normally. If everything is normal, everything can be printed. If problems occur, you should check whether the parts.